


LED PAR LIGHT
18* 4 in 1 LED
WITH ZOOM



USER MANUAL

Display board operation instructions

After turning on the computer, press the MENU key (MENU key) to switch the menu, press the UP key (UP) or the down key (DOWN) to select the setting value, and press the confirmation key (ENTER) to save after the setting, and the display will flash to indicate the data to save.

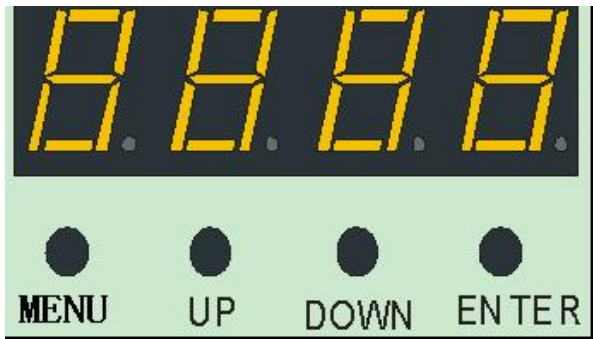

Menu Up Down confirm

Key functions:

MENU key: Select each function

UP: Selects functional parameters incrementally

DOWN: Selects a decreasing function parameter

ENTER: Confirm the current menu

1、 Feature settings

Menu	Numerical values	Description
A001	001-512	console mode or slave mode
A10CH	A10CH D10CH	There are three channels to

	06CH	choose from
FF00	00-99	The pulse changes, from slow to fast
EE00	00-99	Gradual, from slow to fast
CC00	00-99	Jump change, from slow to fast
AUTO	Self-propelled	Self-propelled function
SOUD	Voice control	Varies with the volume of the sound
R	000-255	Positive color LEDs, brightness from dark to bright
G	000-255	Warm white LEDs, brightness from dark to bright
B	000-255	Positive color LEDs, brightness from dark to bright
W	000-255	Warm white LEDs, brightness from dark to bright
F000	000-255	The journey is near and far
SOOO	000-99	Strobe, from slow to fast
T000	000	Temperature control, which displays the temperature according to the thermostat

MENU is the menu switch key, UP and DOWN are numerical switches, and ENTER is the confirmation key.

2、DMX control

A10CH			
channel	Function	Numerical values	Description
1	Total dimming	0-255	
2	Strobe	0-255	
3	Macro function	0-255	

4	Macro function speed	0-255	
5	R	0-255	
6	G	0-255	
7	B	0-255	
8	W	0-255	
9	Focusing	0-255	
10	Reset	0-255	

D10CH			
channel	Function	Numerical values	Description
1	Total dimming	0-255	
2	R	0-255	
3	G	0-255	
4	B	0-255	
5	W	0-255	
6	Strobe	0-256	
7	Macro function	0-255	
8	Macro function speed	0-255	
9	Focusing	0-255	
10	Reset	0-255	

L6CH			
channel	Function	Numerical values	Description
1	R	0-255	
2	G	0-255	
3	B	0-255	
4	W	0-255	
5	Focusing	0-255	
6	Reset	0-255	

Note

- 1、 Please read each item in this manual carefully before installing and using this device.
- 2、 It is prohibited to disseminate the contents of this manual without the permission of the scriptures.
- 3、 This manual is for informational purposes only and is subject to change at any time without notice.
- 4、 Unless the manual has been explained, please do not modify or modify this equipment at will.

Safety tips

- 1、 Before installing and repairing the lamp, please make sure that the power supply of the lamp body is disconnected. Make sure the surroundings of the lamp are well ventilated.
- 2、 This lamp is designed for indoor demonstration, please do not use this product in a humid environment for a long time.
- 3、 This lamp should be avoided from contact with water droplets during use and maintenance, and if it is used outdoors,

please take sufficient waterproof measures.

- 4、 Installation, operation and maintenance personnel must be familiar with the performance of the lamp before starting to operation, most of the damage is caused by unfamiliar with its performance misoperation, please use 85~265VAC voltage.
- 5、 Please do not look directly at the luminary for a long time to avoid discomfort to your eyes.
6. Please wipe the lamps frequently with a clean cloth.